

termin8tor S

Gandy Digital is glad to introduce the Termin8tor S. With all the features used for the successful Termin8tor and more! Termin8tor S is a roll-to-roll printer, perfect for a large scale of applications and goes up to 375sqm/h. There is a sharp print quality using Starfire print heads, staggered in 3 rows for big volume output.

Using the GnTek recirculation solution, the Termin8tor S is composed out of a GZ Negative pressure recirculation system with a compensation function which perfectly uses the positive aspects of the Starfire head, assuring solid ink delivery, minimizing downtime and minimizing maintenance.


The Termin8tor S is available in 3.2m model. The Termin8tor S printer allows you to print on flexible substrates as banners, frontlit, backlit and many more.

With an innovative separating taking up system, the Termin8tor S can dry the printing thoroughly during high speed printing using the IR drier. To increase the production time even more, an additional roll has been added to decrease switching time.

To insure the best quality during high speed printing, pre, mid, post and extended heaters are being used. Also the IR drying system is used. Synchronization IR drying prevents the prints over-burnt and saves energy.

Termin8torS printer is an industrial printer and is built that way! Enhanced aluminum beam, beam holders and body frame assure extreme high speed printing & long running life.

See for yourself and book a demo with one of our representatives or visit www.gandydigital.com for more information.

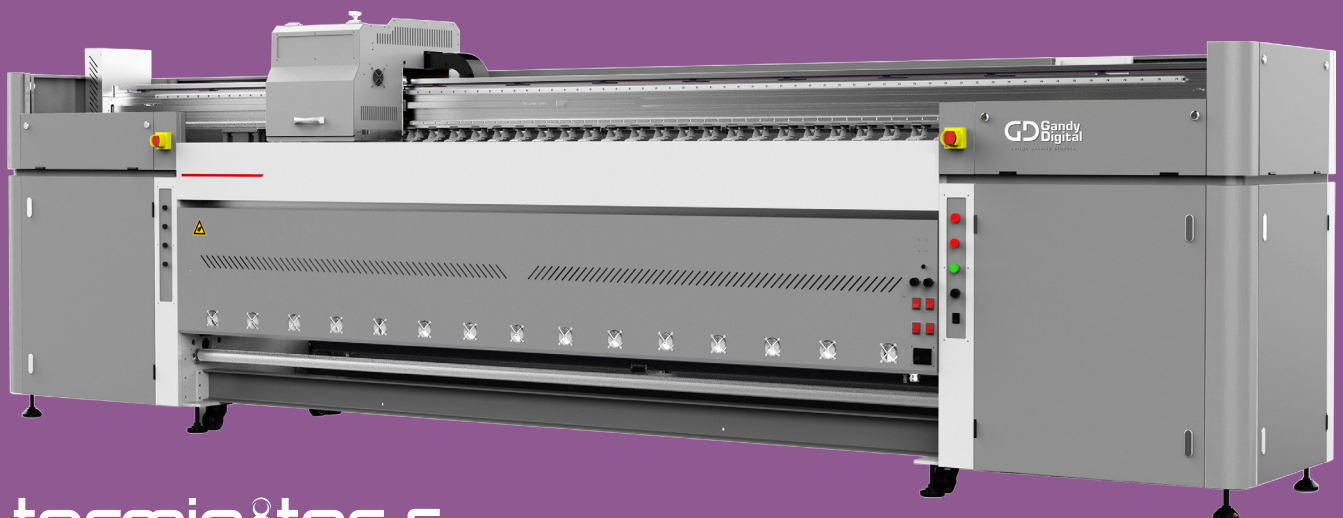

termin8tor S

- 6 Starfire heads in 3 rows, speed up to **375m²/h!**
- More precise and durable **heavy-duty** body!
- Revolutionary print head with Redijet Tech!
- GnTek Negative Pressure Recirculation System!
- **2x Power** Panasonic servo system!
- **Separate taking up** with standby function!
- Advanced color management software!

SPECIFICATIONS

Model	Termin8tor S
Printheads	6 Starfire 1024 staggered in 3 rows
Ink	CMYK solvent/eco-solvent
Ink supply system	GnTek Negative Pressure Recirculation System
Printing width	Max. 3200 mm
Media Type	Banner, Frontlit, Backlit, Vinyl, Film.....
Media delivery system	Automatic media feeding and taking up system with pneumatic shaft
Drying system	Pre, mid, post and extended heater + smart IR drying system
Data Interface	External: USB 2.0; Internal: High-speed SCSI
Working Environment	Temp. 23B°C~29B°C, Humidity: 50%~80%
Software	Onyx+GZ control console
Power	50Hz/AC, 220V.B±.10% 13A(printer)+34A(thermal drying system)+17.5A(separate taking up system)
Installed/Packaged Size	LxVxH(mm): 5500x1100x1670/ 5600x1550x1880
G.W./N.W.	1512kgs/ 1262kgs